


Wiring diagram for TPNCT-MT171 C. T. Operated Meter

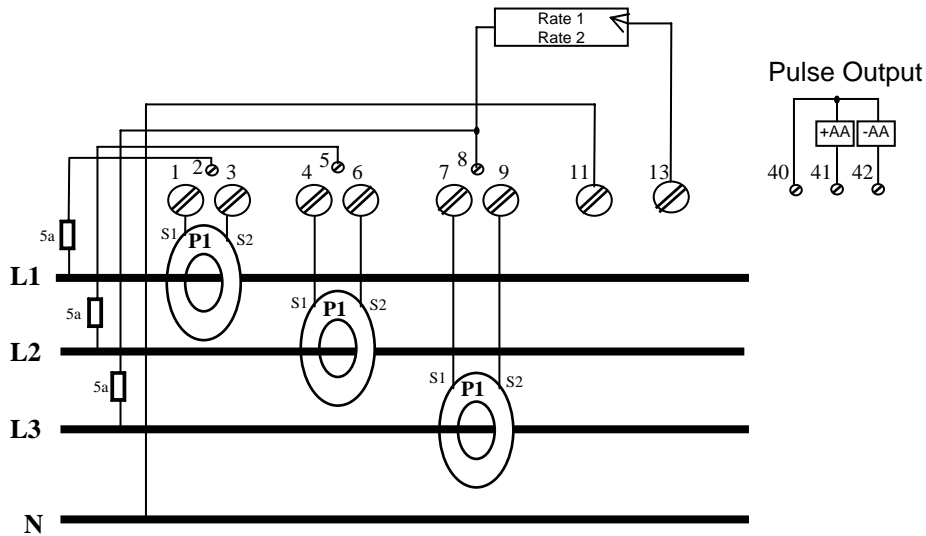

1. Please ensure all CTs are installed as per wiring diagram. E.g., Correct polarity of CTs is ESSENTIAL ie., (P1–Mains) & (P2–Load)
2. Check all S1 & S2 Connections are correct as per wiring diagram otherwise problems will result with the register displays.
3. For health & safety reasons it should be noted that if a Current Transformer is operated with the secondary (S1 & S2) open circuited, DANGEROUS voltages may be generated at the secondary terminals or leads.